




地址: 天津市河北区海河东路78号茂业大厦3001室
网址:<https://www.rubberproduct.net/>

Add: Room 3001, Maoye Building, No. 78 Haihe East Road, Hebei District, Tianjin
<https://www.rubberproduct.net/>

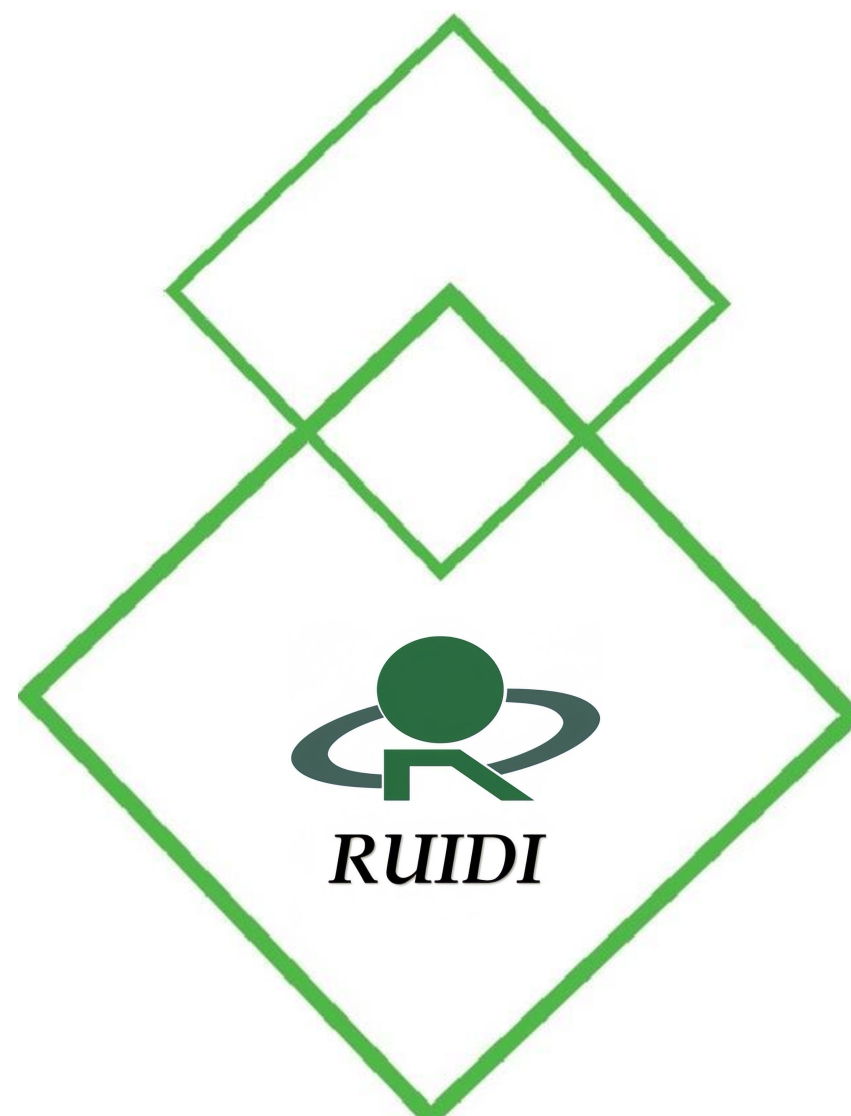

Tianjin Ruidi International Trade Co.,Ltd.
天津瑞地国际贸易有限公司



Company Profile

Tianjin Ruidi International Trade Co., LTD., formerly known as Wen'an County Welfare Industry Company, was established in 1987. It is mainly committed to the production of vibration reduction sealing rubber parts. Now it mainly serves the air conditioning refrigeration industry, the automobile industry, the drainage pipe industry, the machinery industry, etc. We have established long-term and stable business relations with many well-known enterprises.

In 2019, the second factory Chaoyang Rudisino Noise and Vibration Technology Co., LTD was established in Liaoning. The company is committed to the production of special medium and low pressure hose parts, including fluorine rubber, chlorohydrin rubber, chlorinated polyethylene, chlorosulfonated polyethylene and other special rubber hose, shaped hose manufacturing.

The company passed IATF16949 certification and was rated as Hebei Province specialized special new enterprise, provincial R&D center, high-tech enterprise. The company is committed to building a first-class ecological rubber technology products platform company, which can be customized according to user needs, and provide customers with complete rubber technology solutions.

Enterprise qualification



Air Conditioning Weight Rubber

PRODUCT MODEL	A(mm)	OUTSIDE DIAMETER (mm)	HEIGHT (mm)	PIPE DIAMETER(mm)	HEIGHT (mm)
3001A	5.5	30	24	6.35	40g±3
3001B	8.7	30	24	9.52	40g±3
3001C	11.5	30	24	12.7	40g±3
3001D	15	30	24	15.88	40g±3
3001G	7.1	30	24	7.94	40g±3
3001R	5.5	20	23	6	17~22
3001S	7	20	25	7.5	17~22
2009A	14	55	40	15.88	200g±5
2009B	11	55	40	12.7	200g±5
2009C	8.85	55	40	9.52	200g±5
2009E	17.5	55	40	19.05	200g±5
2009F	27.5	55	40	28	180g±5
258克	21	55	40	22	258g±5
160克	21	55	40	22	160g±5
PZK-02	7.8	30	30	7.94	72g±3
PZK-03	9.25	35	35	9.52	115g±3
PZK-04	12.7	35	35	12.7	106g±3
PZK-05	7.8	35	35	7.94	115g±5
PZK-09	7.8	30	30	同心7.94	40g±3
PZK-12	9.52	30	30	同心9.52	40g±3
PZK-14	15.88	40	40	15.88	120g±3
PZK-15	18.5	45	45	19.05	150g±5
PZK-16	9	35	22	9	53g±3
PZK-17	9	40	20	9.52	58±3
PZK-18	7.5	30.5	20	7.5	42.5±3
PZK-19	9	30.5	20	9.52	42.5±3
PZK-20	9	39	44	9.52	100±3
PZK-21	11.7	39	44	12.7	100±3
PZK-22	9	30	20	9	42.5±3
PZK-23W	7	30	22	7	40±3
PZK-25	21	60	52	21	400±10
PZK-26	12.5	30	36.5	12.5	68
PZK-27	7.5	30	28.5	7.9	60
PZK-28	9	30	31	9.3	65
PZK-29	8.7	40	35	9	115g±5
PZK-31	27	70	60	27	410±10
PZK-32	22.22	40	40	25	82±3
PZK-33	4.7	30	24	5~6	50±3
PZK-34	7.5	30	40	7.94	60g±5
PZK-35	6.35	30	40	6.35	60g±5
PZK-36	35	70	62	35	400±10
PZK-37	7	25	64	7	40±3
NP-102	8	22	40	8	35g±5
NP-07	7	20	40	7	35g±5
NP-05	5	20	40	5	35g±5
0014	11.5	35	35	12	106g±3
0015	7.5	30	21	7.94	45±3
0016	9	30	28	9.52	60±3
0066	6	30	21	6.5	46±3
PZK-38	18/21		38		400±30
PZK-40	21	55	40	21	160±8
PZK-41	12	35.5	35	12	108±5
PZK-42	15	35	50	15	142±7
PZK-43	18	36.4	50	18	142±7



The component of product: natural rubber, weight packing, Antiaginy systems.

Use scope: air conditioning, heat pump water heater, air de- humidifier ice machine.

Use parts: connection copper tube shock absorption air con- ditioning compressor.

Method of use: protecting tube glue block action to prevent collisions between the pipe, due to the eccentric protection pipe plastic piece of ontology, to ensure that the assembly lo- cation accurate, usually to protect pipe rubber block position remains unchanged, with a corresponding tighten belt tied.

Air Conditioning Butyl Damper

Name: shockproof adhesive/ butyl damper
Material: butyl damper
Size: assortment
Use the parts: Pipe fittings



Common Specification of shock absorber block

长(A) Long	宽(B) Wide	厚度(H) high	克重(g) Gram weight	每箱数量 Quantity
80	80	2.5	27	600
80	80	5	54	300
80	80	6	65	250
100	80	4	54	300
100	80	1.5	20	750
120	80	5	81	200
120	100	4	81	200
160	120	4	130	125
180	80	4	97	150
120	110	2	44	400
150	90	4	91	100/200
120	90	3	55	350
250	130	3	165	100
220	120	1.5	67	250
220	120	4	179	100

Composition:butyl rubber,anti-aging system, adhesion system,filling system composition.

Use scope:air conditioning,heat pump air can water heater.


Use parts:connection copper tube shock absorption air coditioning compressor.

Directions:use a folded and volume use two packages.

According to different design requirements have different density and size.

Product

quality judging the viscosity (stick steel ball), tension size, hardness(penetration),whether drawing method.

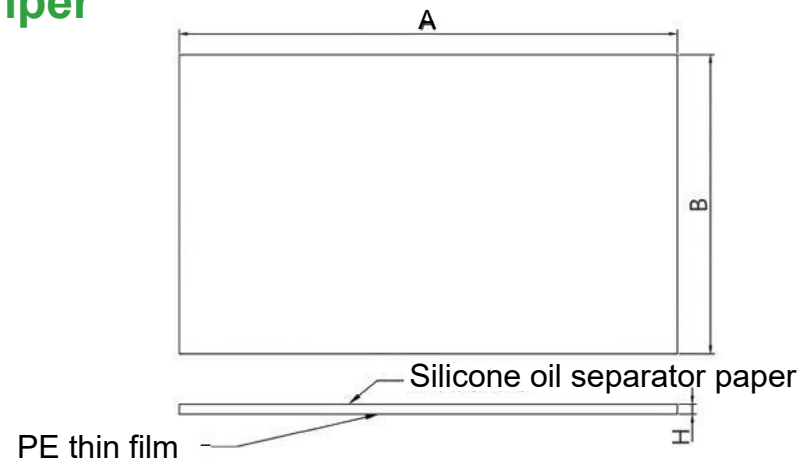


Air Conditioning Rubber Fixed Block

Name: Rubber fixed block
Material: rubber
Size: assortment
Use the parts: Pipe fittings



序号 Number	编号 No.	孔径 Aperture A	孔径 Aperture B	中心距 Center distance C	高度 Height H	图片 Picture
1	0021	6.35	12.7	31	16	
2	0025	9.52	15.88	31	16	
3	30014Z	9.52	9.52	33	22	
4	30014W	6.35	9.52	33	20	
5	0084	7.94	9.52	50	16	
6	1640003	6	16	37	15	
7	1640025	8	19	35	18	
8	1640026	8	16	35	18	
9	1640032	6	29	40	18	
10	GDK-01	12.7	19	55	18	
11	GDK-02	9.52	9.52	32	12	
12	GDK-03	12.5	12.5	50	24	
13	GDK-04	9.4	12.5	35	20	
14	GDK-05	9.3	15.6	16.7	20	
15	GDK-06	6.5	22	32	35	
16	GDK-07	15.7	22.5	50	33.5	
17	GDK-09	9	20	34	17	
18	GDK-10	22	22	30	30	
19	GDK-11	9.6	16	119	24	
20	GDK-12	6.35	12.7	40	25	
21	GDK-13	12.7	40	60	25	
22	GDK-14	9	16	70	16	
23	GDK-15	12.7	22.2	35	15	
24	GDK-16	12.7	12.7	30	15	
25	GDK-17	9.52	12.7	32	15	
26	GDK-18	6.35	15.88	40	15	
27	GDK-19	10	16	14	14.5	
28	GDK-21	9.52	9.52	55X35	20	
29	GDK-22	14	14	70X60	30	
30	GDK-23	6.35	6.35	50X35	20	
31	GDK-24	8	10	50	16	
32	GDK-25	15.88	19	58	18	
33	GDK-26	19	28	55	26	
34	GDK-27	19	28	85	26	
35	GDK-28	6	22	40	25	
36	GDK-29	6	19	48	14	
37	GDK-30	6	13	40	20	
38	GDK-31	11	17	38	14	
39	GDK-32	6	28	40	20	
40	GDK-33	7.94	7.94		20	
41	GDK-34	8	8		50	
42	GDK-35	11.5			40	
43	GDK-37	6	9	20	20	
44	GDK-38	6	9.5	40	15	
45	GDK-39	6	13	40	15	
46	GDK-40	6	22	40	20	
47	GDK-41	21	28	50	30	
48	GDK-42	9.5	16	40	18	
49	GDK-43	6.5	28	47	20	
50	GDK-44	6.5	35	50	20	
51	GDK-45	10	32	67.8	20	
52	GDK-46	15.8	22	50	25	
53	GDK-47	6.35	6.35	40	25	
54	GDK-48	6.35	6.35	30	22	
55	GDK-49	9.6	9.6	68	20	
56	GDK-50	6.35	9.52	25	22	
57	GDK-51W	9.5	12	50	16	
58	GDK-52W	8	9.5	30	16	
59	GDK-53W	6	6	26	16	
60	GDK-54W	9.5	9.5	25	16	
61	GDK-56	6.4	22	42.2	20	
62	GDK-57	19	28	45	25	
63	GDK-58	16	16	70	20	
64	GDK-59	16	51	70	20	
65	GDK-60	12.8			25	
66	GDK-61	12.8	12.8	25.6	30	
67	GDK-62	3.4			40	
68	GDK-63A				20	
69	GDK-63B				20	
70	GDK-64	11.6	11.6	25	20	
71	GDK-65	16	22	99	20	
72	GDK-66	9.52	12.7	40	10	
73	GDK-67	6	15	45	30	
74	GDK-68	12.7	12.7	22	22	
75	GDK-69	28			40	
76	GDK-70	12.6	12.6	50	22	
77	GDK-71	12.6	16.3	12	22	
78	GDK-72	7	22	55.5	25	
79	GDK-73	9.5	9.5	40	15	
80	GDK-74	12	21	65	25	
81	GDK-75	12	21	90	25	
82	GDK-76	13	19	40	18	
83	GDK-77	22.2	22.2	112	20	
84	GDK-78	28.6	28.6	132	20	
85	GDK-79	19	19	68	18	
86	GDK-80	6	9.5	50	15	
87	GDK-81	6	35	50	20	
88	GDK-85	20			32	
89	GDK-90	6	16	48	14	
90	GDK-91	6	9.5	31	15	

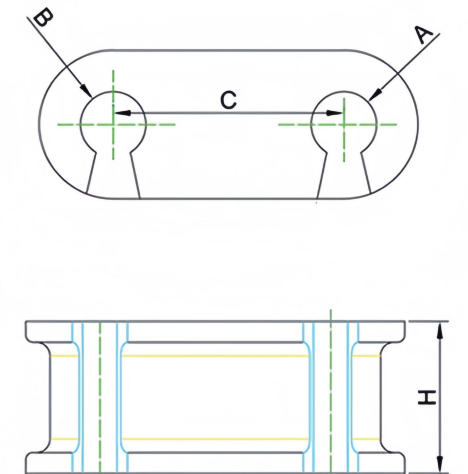

Product composition:natural rubber,anti-aging system composition.

Use scope:air conditioning,heat pump water heater,air dehumidifier ice machine.

Use parts:connection copper tube shock absorption air conditioning compressor.

Method of use:protecting tube glue block action to prevent collisions between the pipe, due to the eccentric protection pipe plastic piece of ontology, to ensure that the assembly location accurate, usually to protect pipe rubber block position remains unchanged,with a corresponding tighten belt tied tightly.



”

Air-conditioning shock absorber and antiseptic use “Ruidi”

Rubber foot for air conditioner

More durable · Quieter · Easier to use

Let it come to you.
Comfortable living environment
Seismic noise reduction



- a. EPDM durable for 30 years.
- b. Steel Plate damping design, better shock absorption!
- c. The platform/steel bracket can be easily fixed and installed




Six generations of Yuanbao



MGD-08









MGD-09

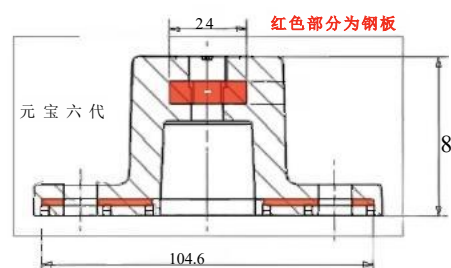

The steel frame and the platform are universal.

Air conditioning platform shock absorber bracket series:
Composition: natural rubber+carbon black+anti-aging system.
Scope: Home air conditioning.
Product role: anti-corrosion, shock absorber noise reduction.

shock-absorbing pad


						
型号 JS-01减震垫 尺寸 60*60*20 M12	型号 JS-02减震垫 尺寸 60*60*30 M12	型号 50方地脚 尺寸 50*50*16 M16	型号 MGD-13 尺寸 100*100*15 M15	型号 JS-11减震垫 尺寸 70*70*17内30*30	型号 LS-02 尺寸 50*35 M10	型号 MGD-20 尺寸 60*31.5 M8
						
型号 ST圆地脚 尺寸 43*85 M8	型号 MGD-08 尺寸 80*80*50	型号 MGD-09 尺寸 80*80*50 M8	型号 304不锈钢地脚 尺寸 165*60*56 M12	型号 JS-13 尺寸 30*25 M8	型号 LS-01 尺寸 80*40 M12	型号 JS-25 尺寸 50*16 M14
						
型号 MGD-07减震垫 尺寸 100*H48 M13	型号 MGD-01减震垫 尺寸 50*30 M12	型号 0012减震垫 尺寸 40*15 M12	型号 637减震垫 尺寸 50*20 M16	型号 MGD-10 尺寸 42*20 M8	型号 MGD-11 尺寸 25*11.6 M19.3	型号 JS-22减震垫 尺寸 34.5*36*10 M10.5
						
型号 DH-001减震垫 尺寸 57*39 M10	型号 0072减震垫 尺寸 60*50*10	型号 室外机地脚KF150 尺寸 64*59*16 M10	型号 室外机地脚KF80 尺寸 51*48*17 M10	型号 MGD-12 尺寸 51*48*17 M10	型号 JS-18减震垫 尺寸 140*38*10 M13	型号 JS-21减震垫 尺寸 160*70*10 M12.5
						
型号 U型-10减震垫 尺寸 70*70*10 M10	型号 U型-20减震垫 尺寸 70*70*20*13	型号 工程机地脚 尺寸 80*70*25*12	型号 航母地脚 尺寸 196.5*90.5*45	型号 水箱地脚 尺寸 136*115*30	型号 229A地脚 尺寸 46*32*21 M9	型号 中方块 尺寸 72*72*10 M8
						
型号 MGD-02减震垫 尺寸 120*60*30 M10	型号 MGD-05减震垫 尺寸 100*50*10 M14	型号 MGD-06减震垫 尺寸 100*50*15 M14	型号 MGD-04减震垫 尺寸 175*85*40 M18	型号 0037减震垫 尺寸 82*42*6	型号 MGD-03 尺寸 170*170*17	型号 小黑方块 尺寸 45*45*9 M8
						
型号 MGD-21 尺寸 175*85*20 φ22	型号 MGD-21 尺寸 175*85*20 φ22	型号 MGD-21 尺寸 175*85*20 φ22	型号 MGD-21 尺寸 175*85*20 φ22	型号 MGD-21 尺寸 175*85*20 φ22	型号 MGD-21 尺寸 175*85*20 φ22	型号 MGD-21 尺寸 175*85*20 φ22

Display the parts of the product




Overwire apron

Name: Overwire apron
Material: rubber
Size: assortment
Use the parts: Threading Hole

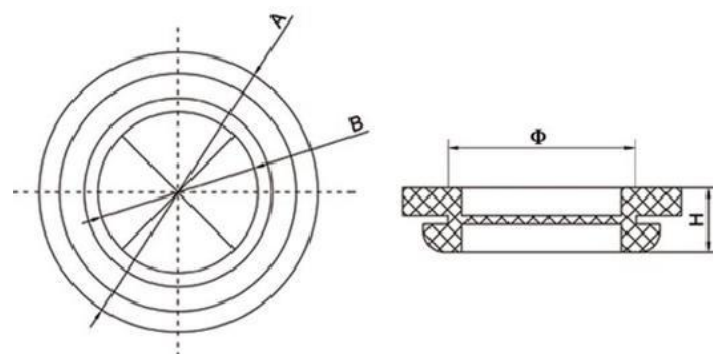

Internal structure analysis diagram

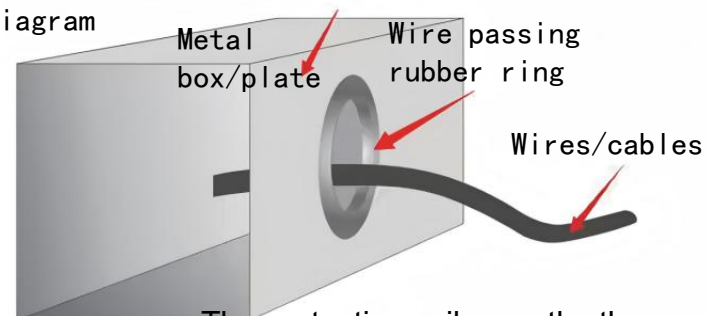

The protective coil smooths the metal hole and prevents wires from being cut by the metal plate.



产品型号 No.	外径 A Outside diameter	内径 B Internal diameter	孔径 Φ Aperture	高度 H Height	图片 Picture
GXHT-01	40	23	$\Phi 27 \pm 0.5$	9	
GXHT-02	43	28	$\Phi 36$	9	
GXHT-04	43	33	$\Phi 37$	12	
GXHT-05	47	47		7	
GXHT-06	61.7*31.2	48.5*18.5	53.3*22.8	7	
GXHT-07	107*48	93*33		7	
GXHT-08	63	42	$\Phi 48$	80	
GXHT-09	98*62	83.5*47	88*52	10	
GXHT-10	63*48	42*26	45*29	68	



Air Conditioning Rubber Fixed Block

This product is made of high quality natural rubber, reinforcing agent, antiaging agent, etc., which is vulcanized and formed by 200 tons of high-precision vulcanizer.




Water Plug

Name: Rubber fixed block
Material: rubber
Size: assortment
Use the parts: Indoor air conditioner unit/
Threading Hole



Commercial air conditioning

Controller heat dissipation
sealing silicone pad

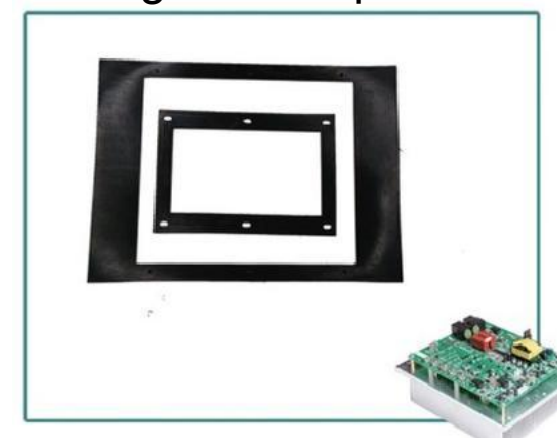

Compressor
waterproof protection



Commercial air
conditioning drain pipe




Rubber coupling



Pipe clamp

Name: Pipe clamp
Material: EPDM
Size: assortment
Use the parts: Copper pipe fixing

序号	名称	A(内径)	适合管径
1	GJ7.94	6.5	7.94
2	GJ9.52	8.5	9.52
3	GJ12.7	12	12.7
4	GJ15.88	15.1	15.88
5	GJ19.05	18.1	19.05
6	GJ22.2	21.2	22.2
7	GJ25.4	24	25.4
8	GJ28.6	28	28.6
9	GJ32	31	32
10	GJ34.9	34	34.9
11	GJ42	41.3	42

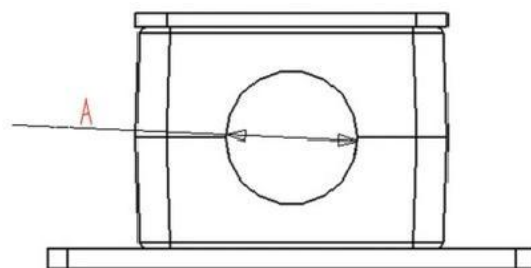

Compressor


Name: Compressor foot
Material: rubber
Size: assortment
Use the parts: Compressor



Rubber products for indoor and outdoor air conditioners

The usage location of the indoor unit of the air conditioner
(corresponding to the drawing number)

Indoor unit installation location (refer to figure number)

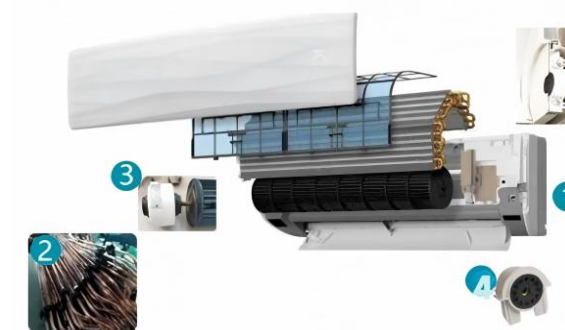

There are 5 types of standard vibration-damping products for indoor AC units.



Water plug Water deflector Motor vibration reduction Bearing Sealing putty

Outdoor unit installation location (corresponding to the figure number)



There are 6 types of conventional vibration damping products for air conditioner outdoor units.



Counterweight block Damping block Double-hole fixed block Outdoor unit shock absorption Wire passing rubber ring Compressor parts

Bearing

Name: Bearing
Material: rubber
Size: assortment
Use the parts: Cross-flow blade



Several major advantages of sealant putty

Fill the void

Material Environment
Take care of your health

Mud density
Self-contained coolant products

Easy to jam
Rip open the package for use

Plastic
Easy defomation

WEIGHT(g) 克重(9)	Number per box 每箱数量
200±10	100
110±10	200
150±10	150
160±10	150



Farewell to leaky houses and bug-proof walls

Other attachments:



Name: Watertight plug
Use the parts: Mobile air conditioning

Name: Nylon banding
Use the parts: Copper Tube damping pad is fixed




Name: Plastic card
Use the parts: Line card

Stud footing

Name: Stud Footing

Use the parts: Pump damping

Number	Name	A	B	C	D	M	PICTURE
1	LS-03 shock-absorbing pad	20±1	30±0.8		Φ 30±0.8	8	
2	LS-04/60 LS-04/50	23±1	30±0.8		中40±0.8	10	
3	LS-05/60 LS-05/50	23±1	40±0.8		Φ 50±0.8	10	
4	LS-02 shock-absorbing pad	23	35	23	50	10	
5	JS-13 shock-absorbing pad	16	25	23	30	8	
6	LS-06 shock-absorbing pad	23	30	23	中40	8	
7	MGD-10 shock-absorbing pad	15	20		Φ 42	8	
8	MGD-20 shock-absorbing pad	24.5	31.5±0.2		Φ 60±0.2	8	

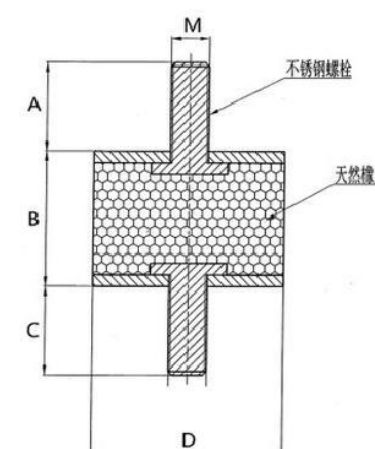

Rubber hose

Name: Rubber hose

Fluorine rubber hose



rubber tube

water pipe



rubber tube

water pipe



rubber tube



Mission

vision

value

To achieve the material and spiritual happiness of all partners of Ruidi, we aim to assist our clients in their development by providing them with professional rubber technology solutions, and contribute to a better human society.

To become a world-class rubber component supplier

To be a century-old happy enterprise respected by society

Partners

AUX 奥克斯

OUTES[®]
中广欧特斯

HUAWEI

LG

SUNRAIN
太阳雨太阳能

Midea[®]
美的

WanJueLong
万居隆

VW

TCL

Hisense

Royalstar 荣事达

FOXCONN[®]
富士康

OUJING
欧井

KEG

KEG
韩电冰箱

Meiling
美菱

DOROSIN
多乐信

SHIFENG GROUP
时风集团

NEW ENERGY
纽恩泰

KELONG GROUP
科隆集团

AMA 生能

Deye 德业

YAMAHA

TICA 天加

PHNIX
芬尼克兹